




ergoCentric
 SEATING • SYSTEMS

The Ind. F Series is designed to meet the rigorous requirements of industrial environments while providing users with superior ergonomic support. Features such as the 14 gauge steel tube 26" multi-level and 22" bi-level industrial bases with an extra polyurethane coating and traction grit on footrests make the Ind. F series a durable solution for harsh factory environments.

The Ind. F can also be specified to meet clean room standards, meeting the cleanliness specifications for:


- Federal Standard 209E, Class 1, 10, 100 & 1000 environments.
- ISO 14644-1 Class 3, 4, 5 & 6 environments.

Adjustment Options:

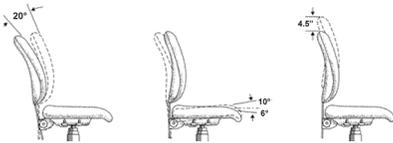

Standard Control

- 30° back angle adjustment
- 4.5" back height adjustment
- 30° back pivot

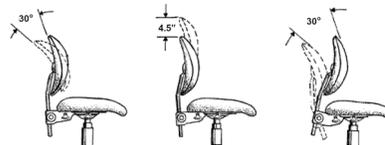

3 Lever Tilt Control (Bar)

- Back height adjustment
- 20° back angle adjustment
- 6-10° seat tilt
- Pneumatic height adjustment



Apt Control

- Back pivot
- Pneumatic height adjustment

Seat Options:



Standard: 17" W x 18.5" H
Extra Small: 17.5" x 15.5"
Large: 20" x 19"

Memory Foam Seat
Triple Density Foam Seat

Armrest Options:



T-Arms

- Polyurethane arm pad 4" W x 10.5" L
- Solid 1/4" thick spring steel frame, epoxy powder coated black

- Arm height from seat pan 7.5"
- Optional black Nyvek upholstered arm pad



3 Inch Adjustable T-Arm

- Finger tip adjustment
- Polyurethane arm pad 3" W x 10.5" L
- Solid 1/4" thick spring steel frame, epoxy powder coated black

- Arm height adjustable from seat pan 6" - 10"
- Arms width adjustable 2" per arm
- Optional black Nyvek upholstered arm pad

Base and Footring Options:



Multilevel Spider



Bilevel Spider



Chrome Base with Footring

PAC Midwest
 Minneapolis, MN
 (888) 903-0333

PAC South
 Dallas, TX
 (800) 442-4008


PAC West
 Los Angeles, CA
 (888) 839-3936

PAC Mexico
 Tecate, Mexico
 (619) 573-4501

Caster Options:



2" Nylon Dual Wheel Caster
 Designed for use on carpet.




2" Urethane Dual Wheel Caster
 Designed for use on hard floor, tile, concrete & marble floors.




2.5" Single Wheel Caster
 Designed for use on heavy carpet.



2.5" Single Wheel Urethane Caster
 Designed for use on rough floor surfaces.



2.25" Lock On Urethane Double Wheel Braking Casters
 Provides the stability of glide and mobility of a caster. When the user's weight is on the chair, the wheels lock. With no weight on the chair, the caster unlocks and moves freely.



2.25" Lock Off Urethane Double Wheel Braking Casters
 Ideal for use on tile floors. When the user's weight is off the chair, a brake is applied to prevent the chair from rolling away.



0.5" Flat Glides
 Provides stability for use on commercial carpet floors.



2.25" Flat Glides
 Provides stability for use on commercial carpet floors.



0.5" Industrial Glides
 Provides stability for use on commercial carpet floors.