

MT4500 Series

Two Layer ESD Table Mat

Protect your sensitive items as well as your work surface with durable ESD matting.


The 4500 series ESD control mats from Transforming Technologies are made of a durable 0.080" thick rubber. A conductive layer backs the static dissipative top layer that creates outstanding electrical performance characteristics. The 4500 series offers excellent resistance to hot solders, soldering irons and most solvents.

MT4500 is available in rolls or cut mats. Cut mats are packaged individually with 10mm snaps and a common point ground cord. Full rolls are 50ft long and can be easily cut with a utility knife to fit your unique workstation. Available in nasa blue, royal blue, green and gray colors.

Meets or exceeds requirements of ANSI ESD-S20.20 and the recommendations of ESD 4.1.

Applications:

Creates an ESD safe work area by providing a path-to-ground for electrical charges as well as protecting the work surface from damage.

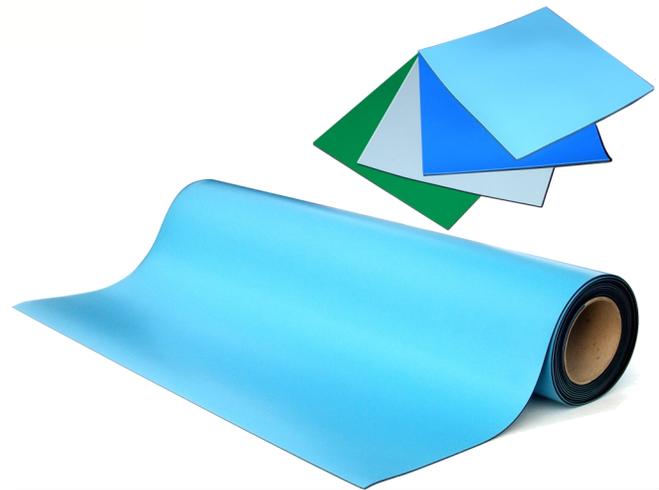

Features

- **Two Layer Rubber: 10^6 - 10^8 Rtt**
- **Excellent Resistance to Hold Solders, Soldering Irons and Most Solvents**
- **Available in 50ft rolls or an Assortment of Ready Made Table Mats**
- **Nasa Blue, Royal Blue, Green, and Gray**

Specifications:

Thickness	0.080"
Hardness	60 Shore A
Tensile Strength	>1000 PSI
Elongation	>300%
Temperature	190F (87C)
Color	Nasa Blue, Gray, Royal Blue
Rubber	Premium NBR
RTG	8×10^{-8} ohms
RTT	2×10^{-8} ohms
Charge Decay	0.01Seconds
Work surface	10^6 - 10^8 ohms Rtt

Part Numbers:

Full Rolls	
MT4524B	Roll Nasa Blue, 24" x 50' x .080"
MT4530B	Roll , Nasa Blue, 30" x 50' x .080"
MT4536B	Roll , Nasa Blue, 36" x 50' x .080"
MT4548B	Roll , Nasa Blue, 48" x 50' x .080"
Replace "B" at the end of the part number with "RB" for royal blue, "GN" from green or "GY" for gray	

Part Numbers:

Cut Mats	
MT2436	Mat, 24" x 36" x .080" , Hardware
MT2448	Mat, 24" x 48" x .080" , Hardware
MT2460	Mat, 24" x 60" x .080" , Hardware
MT2472	Mat, 24" x 72" x .080" , Hardware
MT3648	Mat, 36" x 48" x .080" , Hardware
MT3672	Mat, 36" x 72" x .080" , Hardware

Shipping Dimensions and Weights

Roll, 24"x50':	60lbs - 25"x 9"x 9"
Roll, 30"x50':	74lbs - 31"x 9"x 9"
Roll, 36"x50':	95lbs - 37"x 9"x 9"
Roll, 48"x50':	116lbs - 49"x 9"x 9"

Slows charge removal; meets minimum recommended work surface requirements of ANSI/ESD S20.20 and recommendations of ESD 4.1

This document is prepared for our customers as a service, and is to the best of our knowledge true and accurate. However, it is understood and agreed by the users of this document that we will accept no liability for the conclusions reached. Users of this document may therefore wish to perform additional testing before determining that products mentioned are suitable.