
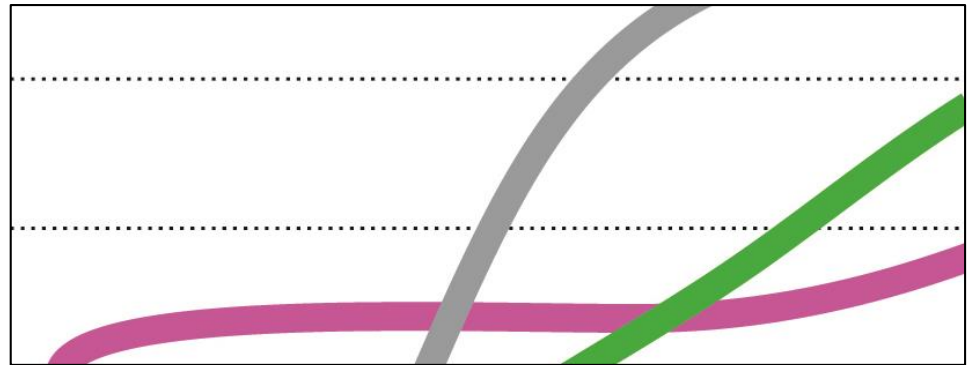


Product Sheet

DESICCANT PERFORMANCE DATA

DESICCANTS FOR A VARIETY OF APPLICATIONS



Desi Pak® (Bentonite): Moisture Adsorbent

Desi Pak (and Desi-Can®) Bentonite desiccants are an effective and economical desiccant option. A calcium-rich montmorillonite, Desi Pak's layered structure attracts and binds water molecules to its vast inner and outer surface area. Even at full water vapor capacity, Desi Pak remains dry and free-flowing with no apparent change in size, shape or texture. The adsorption capacity of Desi Pak is considerable even at low humidity levels and increases as relative humidity rises. Desi Pak's adsorption rate is high enough to prove effective for most applications at low humidity. At high humidity levels, Desi Pak adsorbs moisture much more slowly than silica gel or molecular sieve, making handling less problematic. Desi Pak's adsorption capacity as a function of temperature remains constant at constant relative humidity between 20°C and 50°C.



Sorb-it® (Silica Gel): Moisture Adsorbent

Sorb-it desiccants are made of highly porous amorphous silicon oxide. Sorb-it binds water molecules in random intersection channels of various diameters and remains dry and free flowing, even after fully saturated with water vapor. Sorb-it's adsorption capacity is relatively small at low humidity levels but increases as humidity rises. At high humidity levels, Sorb-it adsorbs moisture much faster than desiccant clay. Sorb-it's adsorption capacity as a function of temperature decreases slightly at constant relative humidity between 20°C and 50°C.




Tri-Sorb® (Molecular Sieve): Moisture and Odor/Gas Adsorbent

Tri-Sorb molecular sieve desiccants are the most aggressive of Clariant's desiccant options. Based on the synthetic zeolite (molecular sieve) types 3A, 4A and 13X, these zeolites exhibit crystalline structures with well-defined and uniform pores of 3Å, 4Å and 10Å diameters respectively. Tri-Sorb adsorbs water vapor and gas molecules that fit into the pores. The adsorption capacity of Tri-Sorb is relatively high at low humidity levels and remains almost constant as relative humidity increases. The adsorption rate is also high at high humidity levels, where Tri-Sorb accepts moisture much faster than Desi Pak, making handling more difficult. The adsorption capacity of Tri-Sorb as a function of temperature remains constant at constant relative humidity and absolute humidity between 20°C and 50°C.



Getter Pak® (Carbon): Odor and Gas Adsorbent


Getter products are designed to control objectionable odors and gases within packaged products. Made of activated carbon, Getter has a highly porous structure and surface area that attracts and bonds with gases and volatile organic molecules. Getter is capable of adsorbing 50 percent of its weight of carbon tetrachloride (tetrachloromethane) at 25°C.




2-in-1 Pak® (Bentonite or Silica Gel with Carbon): Moisture and Odor/Gas Adsorbent

2-in-1 products combine activated carbon with either Bentonite or silica gel to control moisture, gas and odors simultaneously.


1. Adsorption capacity as a function of RH

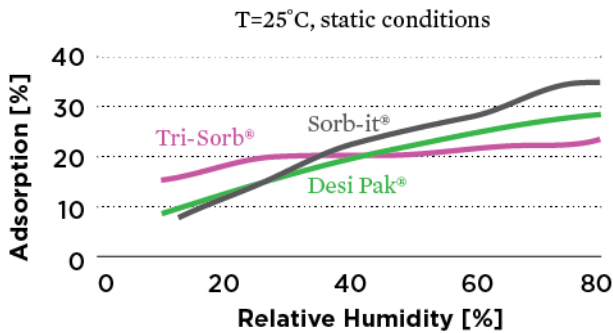


2. Adsorption capacity as a function of temp. @ constant RH

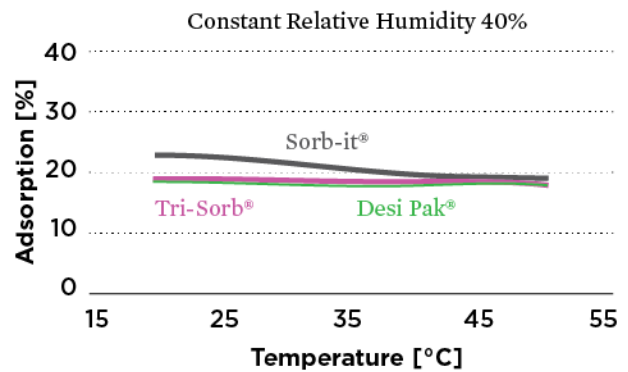

3. Adsorption rates at low humidity levels

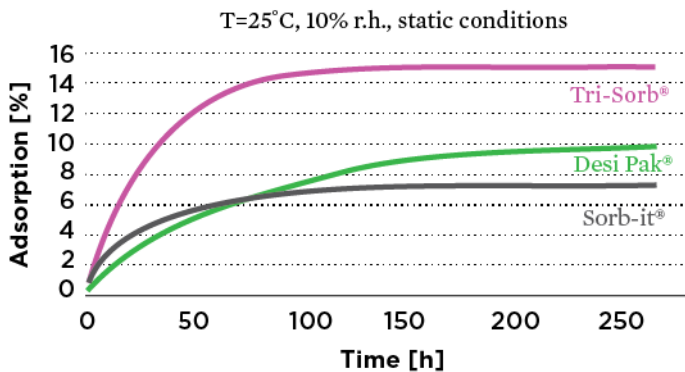

4. Adsorption rate at high RH

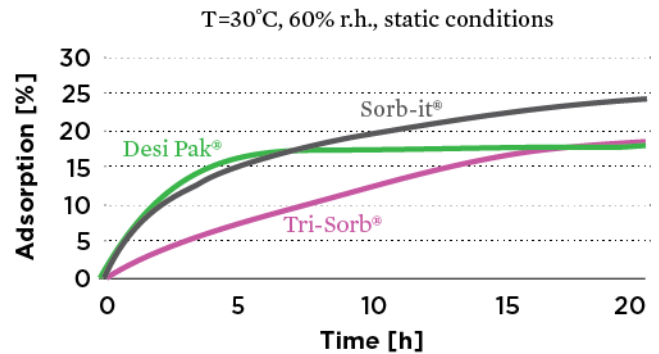

CLARIANT INTERNATIONAL LTD
Cargo & Device Protection
– BU Functional Minerals

This information corresponds to the present state of our knowledge and is intended as a general description of our products and their possible applications. Clariant makes no warranties, express or implied, as to the information's accuracy, adequacy, sufficiency or freedom from defect and assumes no liability in connection with any use of this information. Any user of this product is responsible for determining the suitability of Clariant's products for its particular application.* Nothing included in this information waives any of Clariant's General Terms and Conditions of Sale, which control unless it agrees otherwise in writing. Any existing intellectual/industrial property rights must be observed. Due to possible changes in our products and applicable national and international regulations and laws, the status of our products could change. Material Safety Data Sheets providing safety precautions, that should be observed when handling or storing Clariant products, are available upon request and are provided in compliance with applicable law. You should obtain and review the applicable Material Safety Data Sheet information before handling any of these products. For additional information, please contact Clariant.

* For sales to customers located within the United States and Canada the following applies in addition: NO EXPRESS OR IMPLIED WARRANTY IS MADE OF THE MERCHANTABILITY, SUITABILITY, FITNESS FOR A PARTICULAR PURPOSE OR OTHERWISE OF ANY PRODUCT OR SERVICE.

© Trademark registered in many countries and owned by Clariant
2016 Clariant International Ltd, Rothausstrasse 61, 4132 Muttenz, Switzerland

ISSUE:
May 2016

