

GL6500N Series - Nitrile Coating ESD Level 6 Cut Resistant Gloves

Performance

- 18 gauge exclusive lining technology contributing it the thinnest cut F glove
- Over 38% lighter than a standard cut F glove
- ANSI Cut level A6 Certified
- EN16350 anti-static approved
- 10-finger touch screen compatible
- Perfect dexterity, flexibility, super comfort & fitting
- Super grip in both dry and wet conditions
- Breathability to keep your hands cool while working

Application

- Automotive industry
- Glass industry
- Paper industry
- Construction
- Electronics industry


12 pairs per bag

Wash at 40 C max and machine washing available

The gloves are cut resistant, not cut proof. Do not use them next to moving machinery.

Certification

 EN388 ABRASION 0 1 2 3 4 TEARING 0 1 2 3 4 4X43F ISO 13997 A B C D E F	 ANSI A6 CUT	 EN16350 TOUCH SCREEN COMPATIBLE	 OEKO-TEX® STANDARD 100 MADE IN GERMANY
 EN407 LIMITED FLAME SPREAD 0 1 2 3 4 CONVECTIVE HEAT 0 1 2 3 4 SMALL SPLASHES OF MOLTEN METAL 0 1 2 3 4	 ESD ESD	 EN388 CONTACT HEAT 0 1 2 3 4 RADIANT HEAT 0 1 2 3 4 LARGE SPLASHES OF MOLTEN METAL 0 1 2 3 4	 EN407 CONTACT HEAT 0 1 2 3 4 RADIANT HEAT 0 1 2 3 4 LARGE SPLASHES OF MOLTEN METAL 0 1 2 3 4

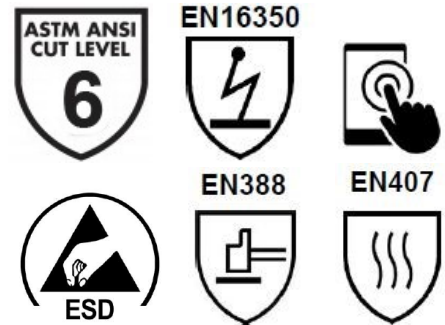

Specifications

Coating Material: Nitrile
 Coating Color: Black
 Liner: UHMWPE/Metal Wire
 Liner Color: Grey
 Finishing: Sandy
 Cuff Style: Knit Wrist
 Gauge: 18
 Contains: UHMWPE, Steel wire, Nylon, Spandex, Polyester, Nitrile

Resistance: 1x10⁶-1x10⁸

[Test Report](#)

Part Numbers:

- GL6501N—Extra small, Nitrile Coated, Blue Cuff
- GL6502N—Small, Nitrile Coated, Yellow Cuff
- GL6503N—Medium, Nitrile Coated, Red Cuff
- GL6504N—Large, Nitrile Coated, Green Cuff
- GL6505N—XL, Nitrile Coated, White Cuff
- GL6506N—2XL, Nitrile Coated, Brown Cuff

Sizes	XS	S	M	L	XL	2XL
Palm Width (cm)	8.50	9.00	9.50	10.00	10.50	11.00
Total Length (cm)	22.00	23.00	24.00	25.00	26.00	27.00