
Metal-Out Static Shielding Bag 1500

This transparent metal-out static shielding bag is designed to provide static safe packaging for the shipment and/or storage of ESD sensitive items including outside ESD protected areas. Bags are printed with an ESD protective symbol and a lot code for traceability. Open Top and ZipTop styles are available. The bags are heat sealable.

SCS Metal-Out Static Shielding Bags 1500 are manufactured from a top coated metallized polyester and polyethylene laminate. The proprietary top coating is designed to protect the metal layer and quickly discharge any electrical field. Polyester dielectric, in concert with the metal layer, provides shielding for the bag contents from Electrostatic Discharge (ESD) and helps minimize the penetration of an electrical field.

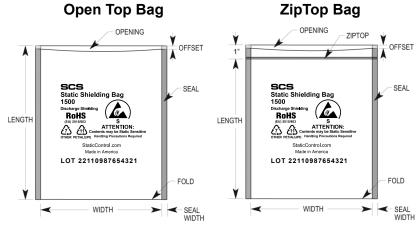

** Bags are printed (hot stamp or thermal) with an ESD protective symbol and a lot code for traceability. **


Tolerance: Width -0, +1/4" Length +/- 1/8" Offset 0 to 1/4"

Seal width 3/8" with a tolerance of +/- 1/8"


Polyethylene

Note: Standard bag markings shown above and are not to scale.

Abrasion Resistant Coating



Meets ANSI/ESD S20.20, Packaging Standard ANSI/ESD S541, and Static Control Bag ANSI/ESD S11.4 Level 3

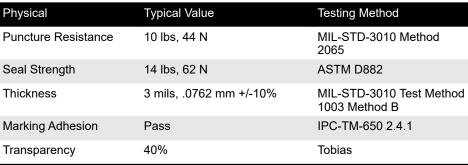

| Electrical | Typical Value | Testing Method |
|----------------------------------|--|-------------------|
| Discharge Shielding | <10 nJ | ANSI/ESD STM11.31 |
| Surface Resistance - Interior | $1 \times 10^4 \text{ to} < 1 \times 10^{11} \text{ ohms}$ | ANSI/ESD STM11.11 |
| Surface Resistance - Exterior | $1 \times 10^4 \text{ to} < 1 \times 10^6 \text{ ohms}$ | ANSI/ESD STM11.11 |
| Charge Retention | <100 volts | 1410.515 |
| Cleanliness | Typical Value | Testing Method |
| Silicone | Not Detected | ASTM-E168 (FTIR) |
| Heat Sealing Conditions | Typical Value | |

300°F - 375°F, 149°C - 190°C

30 - 70 PSI, 206 - 482 KPa

Bag is free of amines, N-octanoic acid, silicones and heavy metals.

0.5 - 3.5 seconds

This product is intended for commercial use only.

Specifications and procedures subject to change without notice.

1500 SERIES METAL-OUT STATIC SHIELDING BAG

Temperature

Time

Pressure



SCS

DRAWING NUMBER 1500 Series

DATESeptember
2021