


Botron High Quality Light weight portable wrist strap checker **B8203**. A large 3/4" touch button for easy testing. Easy to read LED's light s, Low, High and Good. Audible signal will sound when good. Checks all standard wrist straps and coil cords. Has a test range from 725k-10megohms great for field service or area was mobility is required.
Disclaimer. All statements of technical information are believed to be true and are based upon tests we believe to be reliable. The proper use and application for this product must be the responsibility of the user. The statements herein shall have no force or effect.

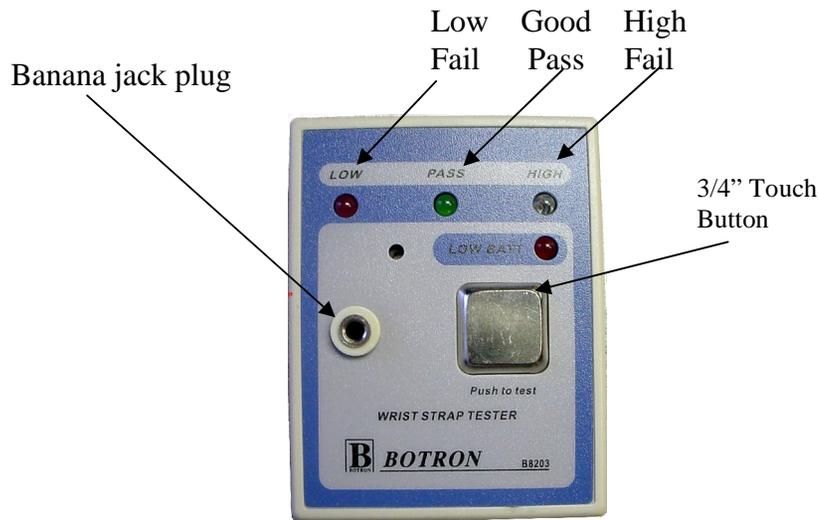

OPERATION:

Unscrew two screws on back of unit and insert 9v battery into compartment. To test wrist straps, with strap on, plug banana plug from coil cord into banana jack hole on front with your hand press touch button. To test just coil cords, unplug coil cord from strap, plug banana end into jack in front of unit with snap end in hand touch coil head (metal part) to touch button pressing down. If unit you are testing is good green LED will come on and audible signal will sound.

OTHER PRODUCTS:

- B8201** Touch plate wrist strap Tester
- B8511** Combo tester, wrist & heel
- B82450** Combo testers & stand
- B82250** Dual tester & stand
- B85501** Wrist Calibration unit
- B85502** Combo Calibration unit
- B8506** Wall test station



B9008

RELATED TEST EQUIPMENT:

- B8571** Digital / Analog Megger
- B8563** Analog Megger meter
- B8530** Constant monitor
- B9202** Constant monitor
- BSRM-10** 10 light surface meter
- BSRM-6** 6 light surface meter.

PROPERTIES

SPECIFICATIONS

- Light weight
- 9 volt battery operated
- LED lights
- >725k-10megohm
- +/-10% Hi /20% low
- Audible signal when good
- Checks all standard wrist straps and coils
- 3.5"x4.5"x1.5"
- LED lights (3)
- Low Battery LED
- Good For field kits

BOTRON CO. INC.

325 W. MELINDA LN
 PHOENIX AZ 85027
 PH# 623-582-6700 FAX# 623-582-6776

sales@botron.com / www.botron.com

PORTABLE 9V WRIST STRAP TESTER

S8203